
TECHNICAL DATA SHEET

SAFETY & SECURITY WINDOW FILM

SAFETY & SECURITY LINE

SAFETY 24 MIL

87% VISIBLE LIGHT	**24 mil** FILM THICKNESS
650 lb/in BREAK STRENGTH	**ASTM F3561 L2** TESTED / RATED TO

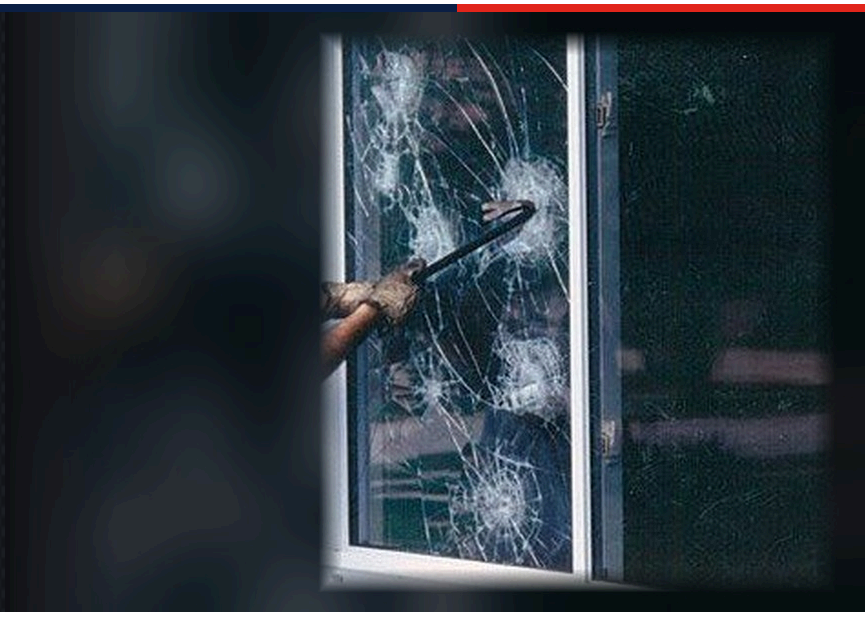

PERFORMANCE DATA

Visible light transmitted (VLT)	**87%**
UV rejected	**99%**
Total solar energy rejected	**19%**
Glare reduction	**1%**
Solar reflected / absorbed / transmitted	**9 / 14 / 77%**
Visible reflectance int. / ext.	**8 / 8%**
Shading coefficient / SHGC	**0.93 / 0.81**
Tested / rated to	**ASTM F3561 Level 2**

PHYSICAL PROPERTIES

Tensile strength (avg.)	**32,000 psi**
Break strength	**650 lb/in**
Puncture strength	**>335 lb**
Elongation	**>200%**
Peel strength (adhesion)	**>5 lb/in**
Tone / product code	**Clear / FSAF2460100**

BENEFITS

- **Maximum protection**
  Our thickest film for high-security sites; ASTM F3561 Level 2.
- **Holds broken glass in place**
  Keeps shards together to help protect people from flying glass.
- **Delays forced entry**
  Adds time and effort for anyone trying to get through the glass.
- **Optically clear with UV protection**
  87% visible light and 99% UV rejection: the view stays the same.

THICKNESSES (MIL)

4 | 7 | 8 | 11 | 12 | 14 | 16 | 18 | 21 | **24**

All tested materials were applied on a ¼″ clear glass surface in accordance with industry standard tests. Data is for comparison purposes only.

DC INTERNATIONAL
7868 NW 62nd Street, Miami, FL 33166
305-431-6570 · WhatsApp
www.dcifilms.com